


No.	DESCRIPTION	MATERIAL
1	CAP	CAST BRASS ASTM B62 ALLOY C83600
2	SOLID PIN	BRASS ASTM B16 ALLOY C36000
3	STEM	LOW LEAD BRASS ALLOY
4	O-RING	EPDM ASTM D2000
5	BALL	LOW LEAD BRASS ALLOY
6	BODY	CAST LOW LEAD BRASS ALLOY
7	GASKET - SEAL	NITRILE ASTM D2000
8	END PIECE	CAST LOW LEAD BRASS ALLOY
9	SADDLE NUT	CAST BRASS ASTM B62 ALLOY C83600
10	SNAP RING	PHOS BRONZE
11	RUBBER GASKET	NITRILE ASTM D2000
12	CTS GSKT	ASTM D2000(SBR)&410 STAINLESS STEEL
13	CONNX NUT	CAST BRASS ASTM B62 ALLOY C83600

SIZE	A	B	C
5/8x3/4x3/4	1.70	2.08	2.32
5/8x3/4x1	1.70	2.03	2.32
1	1.95	2.28	2.62

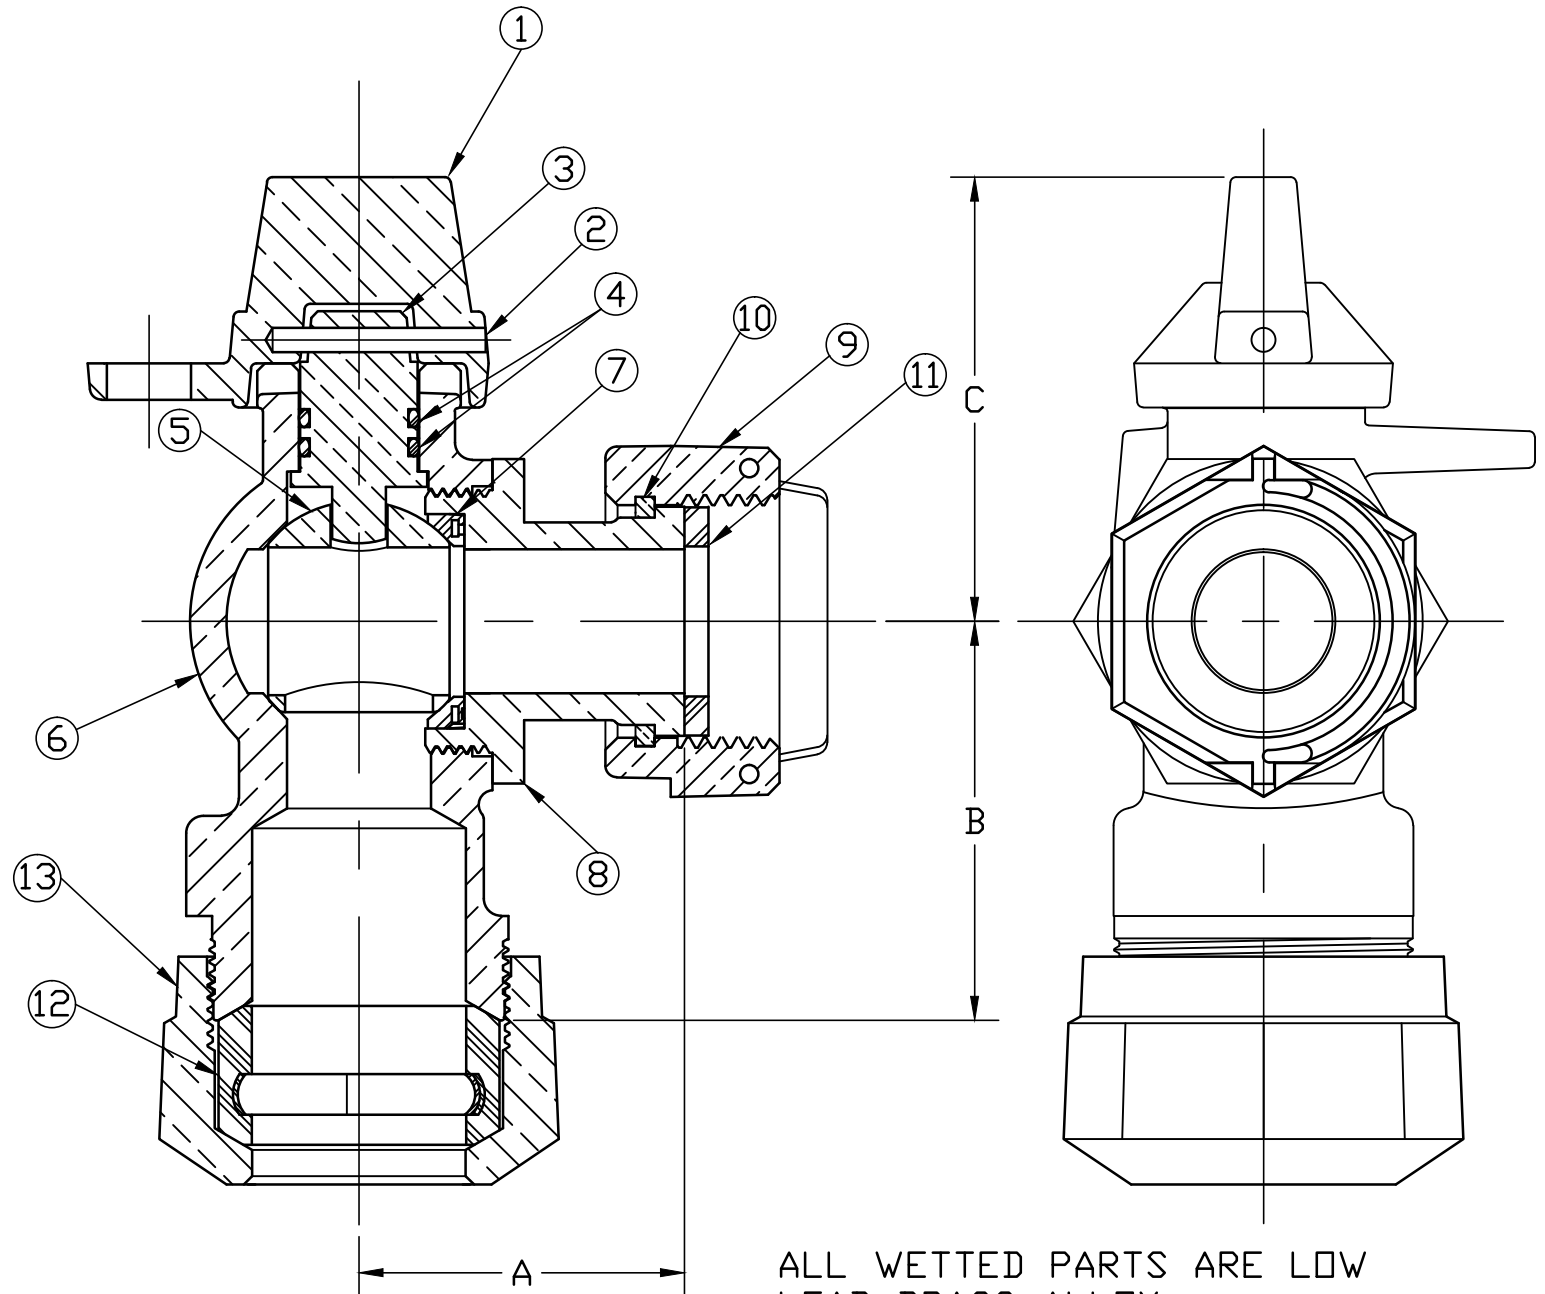

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\B24259N

DRFTR	RWB	6/24/13	Mueller Co.		
CHKR					
ENGR					
MGR					
			UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	
			SURFACE PREPARATION:		
			BREAK CORNER(S) ---- .000		
			SURFACE FINISH -- XX RMS	REF. No.	
			TOLERANCE(S):	SCALE	
			LINEAR ----- ± .000	NONE	
			ANGULAR ----- ± 0°00'		
			STK No:		
			MAT'L:		
			DESCR.	BALL ANGLE METER LLB VALVE (110 IPS x MTR)	
				DWG NUMBER B24259N	
REV	ECR	DESCRIPTION	DATE	BY	CHKR
PER EST NO: DXXXX EST FIN WT = 0.0000 lbs					

DWG NUMBER
B24259N
442-MRKTG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED