
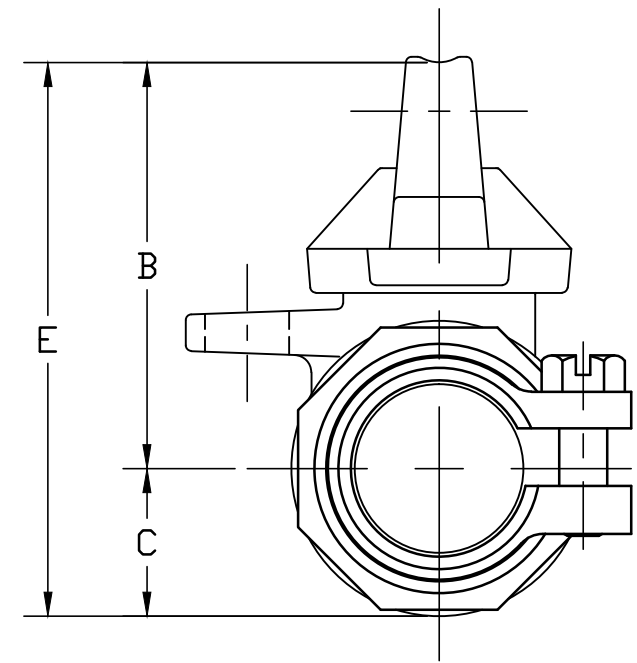


ITEM	DESCRIPTION	REQ'D	MATERIAL DESCRIPTION
1	BODY	1	CAST LOW LEAD BRASS ALLOY
2	CAP	1	CAST BRASS ASTM B62 ALLOY C83600
3	STEM	1	LOW LEAD BRASS ALLOY
4	BALL	2	LOW LEAD BRASS ALLOY
5	GASKET	1	ASTM D2000 (BUNA-N)
6	SPIROD PIN	1	AISI 303 STAINLESS STEEL
7	O-RING	1	ASTM D2000 (EP)
8	END PIECE	1	CAST LOW LEAD BRASS ALLOY
9	PJ GASKET	1	ASTM D2000 (NITRILE)
10	PJ WASHER	1	POLYPROPYLENE
11	PJ CPLG NUT	1	CAST BRASS ASTM B62 ALLOY C83600
12	SNAP RING	1	COPPER ALLOY WIRE CDA 521
13	SADDLE NUT	1	CAST BRASS ASTM B62 ALLOY C83600
14	RUBBER GASKET	1	ASTM D2000 (SBR)



SIZE	A	B	C	D	E
5/8 x 3/4 x 1	.750	2.314	.840	3.569	3.154
3/4	.750	2.314	.840	3.444	3.154
1	1.000	2.625	1.150	4.711	3.775

SIZE	A	B	C	D	E
3/4 x 5/8 R	.625	2.120	.75	3.413	2.870
3/4 R	.625	2.120	.75	3.592	2.870
1 R	.75	2.322	.84	3.569	2.322

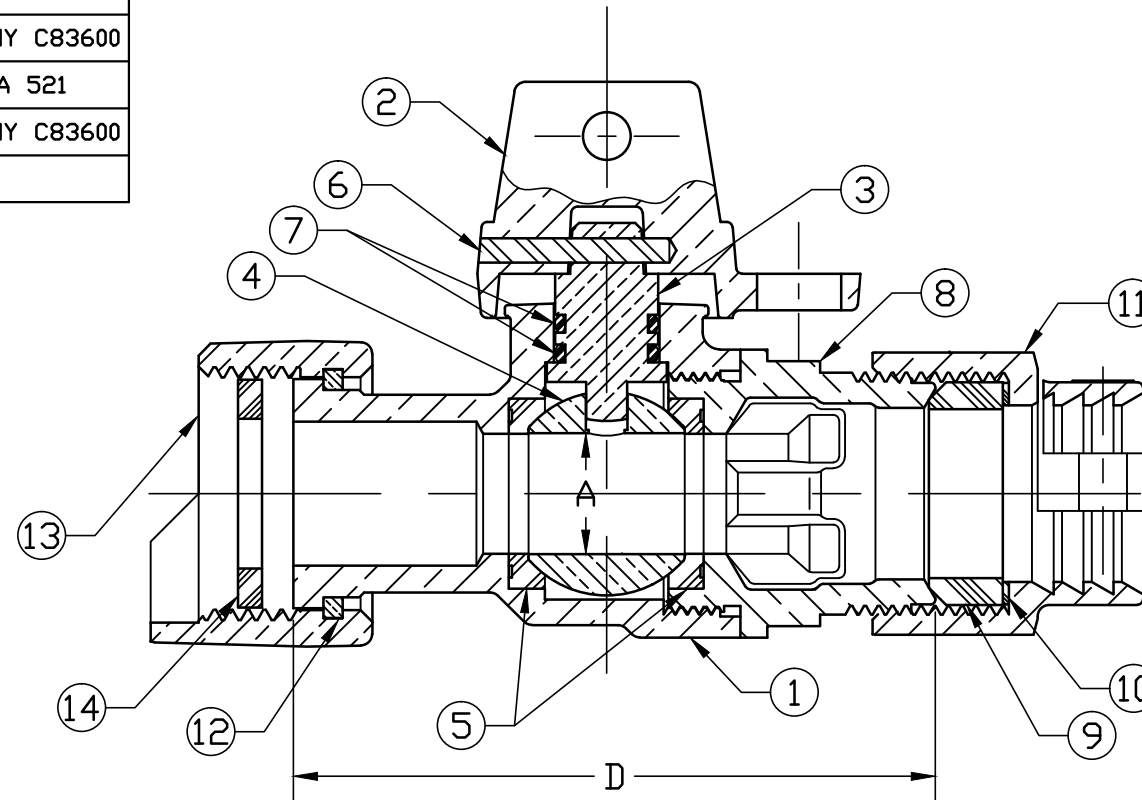

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\APPROVED\P24350N

DRFTR	RWB	7/24/13			
CHKR					
ENGR					
MGR					
			UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	
			SURFACE PREPARATION:		
			BREAK CORNER(S) ---- .000		
			SURFACE FINISH -- 000 RMS	REF. No.	
			TOLERANCE(S):	SCALE	
			LINEAR ----- ± .000	NONE	
			ANGULAR ----- ± 0°00'		
			STK No:		
			MAT'L:		
			DESCR.		
			INLINE LLB BALL METER VALVE	DWG NUMBER	
			MTR x PJ CTS	P24350N	
REV	ECR	DESCRIPTION	DATE	BY	CHKR
PER EST NO: DXXXX EST FIN WT = 0.0000 lbs					

DWG NUMBER  
 P24350N  
 442-MRKTG