


No.	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	CAP	CAST BRASS ASTM B62 ALLOY C83600
3	STEM	LOW LEAD BRASS ALLOY
4	BALL	LOW LEAD BRASS ALLOY
5	GASKET	ASTM D2000 (NITRILE)
6	ROLL PIN	AISI 303 STAINLESS STEEL
7	O-RING	ASTM D2000 (EP)
8	END PIECE	CAST LOW LEAD BRASS ALLOY
9	END PIECE	CAST LOW LEAD BRASS ALLOY
10	O-RING	ASTM D2000 (EP)
11	CTS GASKET SUB	ASTM D2000(SBR)&410 STAINLESS STEEL
12	CONNX NUT	CAST BRASS ASTM B62 ALLOY C83600

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

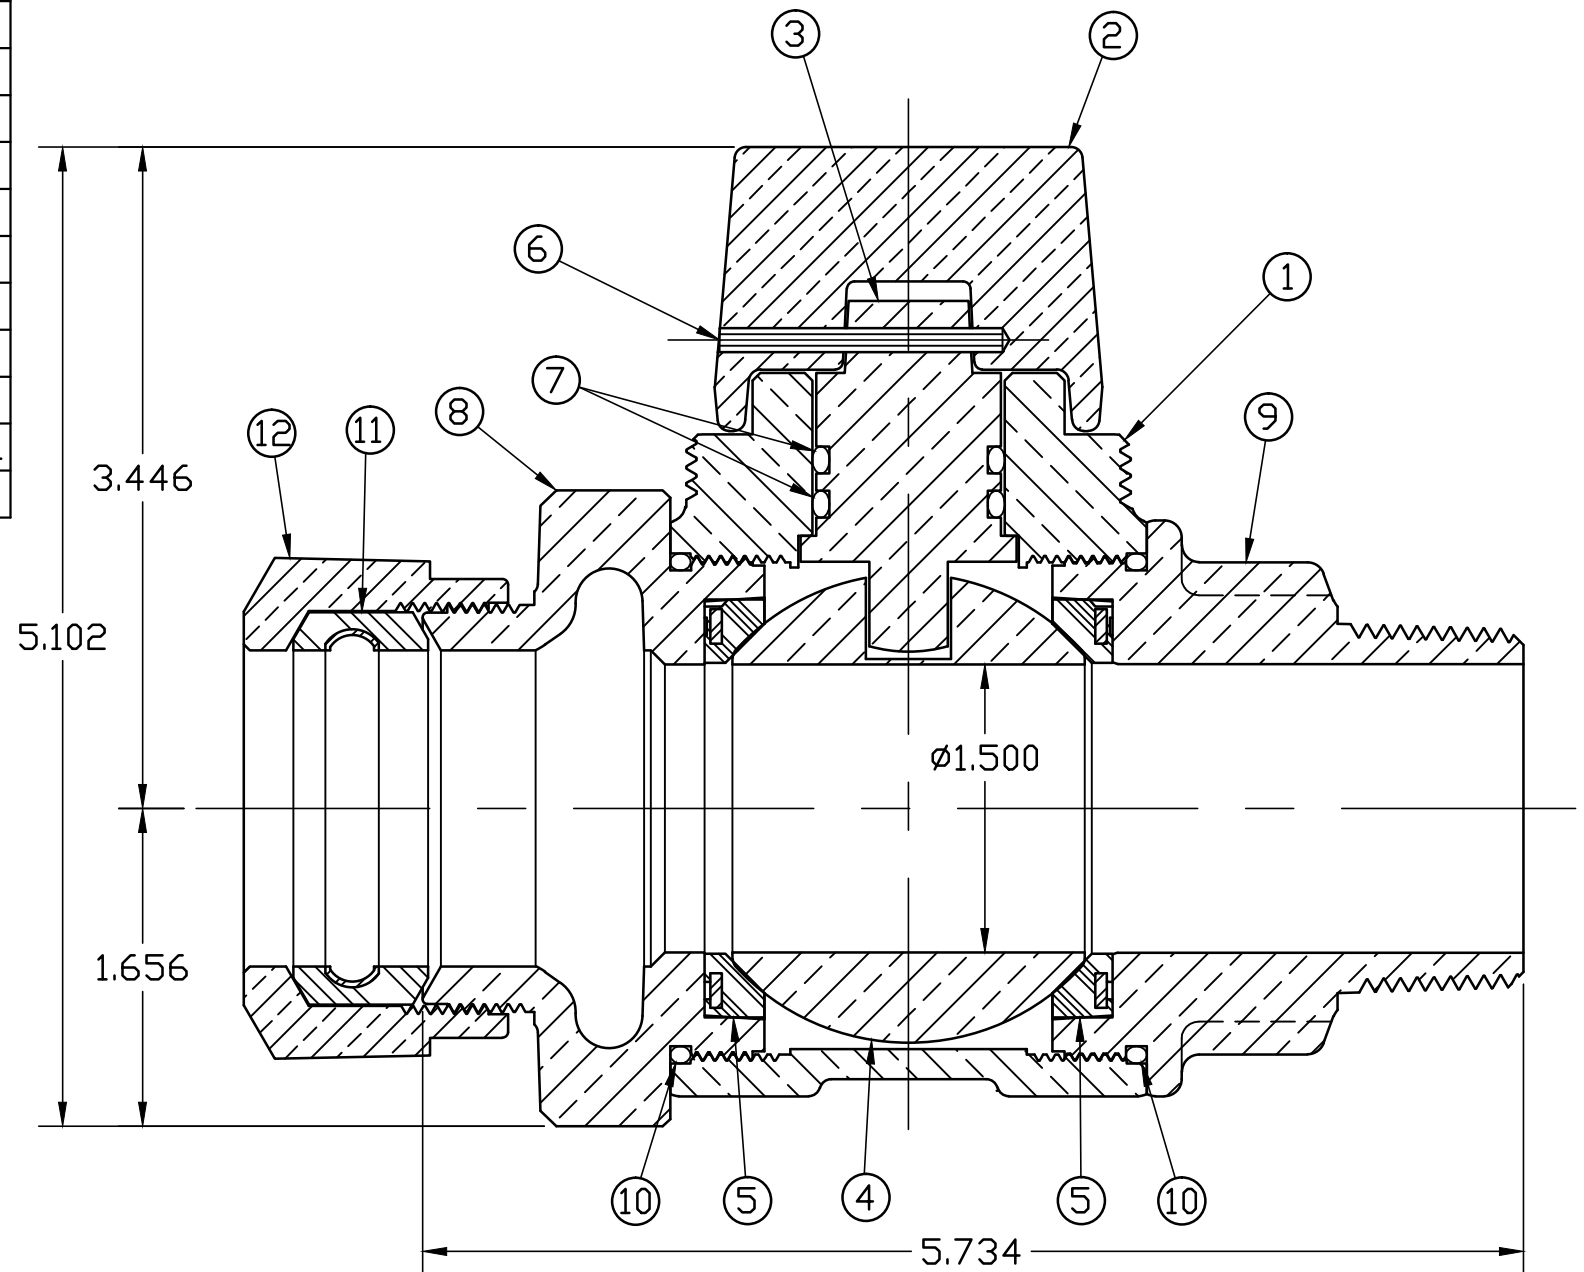

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\B25153N

						DRFTR	RWB	4/22/15	Mueller Co.		UNLESS OTHERWISE NOTED SURFACE PREPARATION: BREAK CORNER(S) ---- .000 SURFACE FINISH --XXX RMS TOLERANCE(S): LINEAR ----- ± .000 ANGULAR ----- ± 0°00'		THIRD ANGLE PROJECTION REF. No. SCALE FULL	
					CHKR									
					ENGR									
					MGR									
									BY	DATE				
									STK No:					
									MAT'L:					
									DESCR.		DWG NUMBER			
									1-1/2" INLINE LLB MINN BALL TOP CURB VALVE		B25153N			
									(110CTS x MIP)					
									PER IL NO: 150092 EST FIN WT = 0.0000 lbs					

DWG NUMBER
B25153N
442-MRKTG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED.