
No.	DESCRIPTION	MATERIAL								
1	B□DY	CAST LOW LEAD BRASS ALLOY								
2	KEY	CAST LOW LEAD BRASS ALLOY								
3	KEY WASHER	CAST BRASS ASTM B62 ALLOY C83600								
4	KEY NUT	CAST BRASS ASTM B62 ALLOY C83600								
5	COMPRESSION GASKET	RUBBER								
6	COUPLINIG NUT	CAST BRASS ASTM B62 ALLOY C83600								

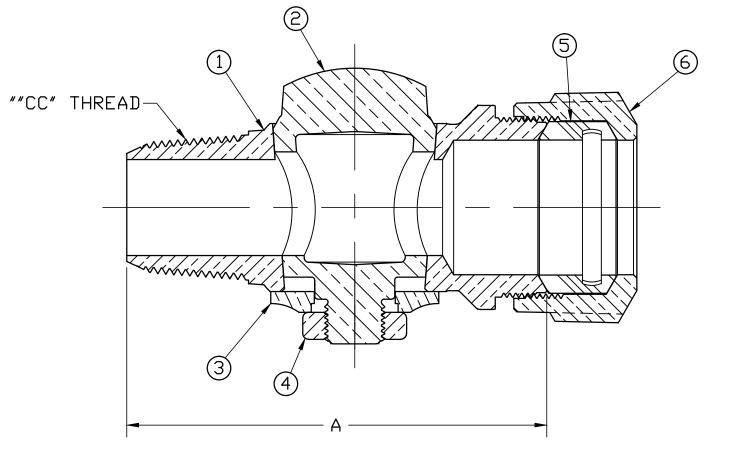

VALVE SIZE	Α			
3/4"	3,97			
1"	4.44			

## NOTE: ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\APPROVED\H15009N

				ı				1					
								DRFTR	RWB	5/21/14			
								CHKR			]		
								ENGR					
								MGR			UNLESS OTHERWISE NOTED T	HIRD ANGLE P	ROJECTION
											SURFACE PREPARATION: BREAK CORNER(S)000	<del>(</del> ⊕) €	
											SURFACE FINISH XX RMS	REF. No.	SCALE
									BY	DATE	TOLERANCE(S): LINEAR ± .000		
							STK No:			ANGULAR ± 0°00′		FULL	
								MAT'L:					
Г	TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller CO. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller CO. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUME							DESCR				חויים	NUMBER
		RE∨	ECR	DESCRIPTION	DATE	BY	CHKR		CORPORATION STO		RATION STOP - LLB		
OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED		PER EST NO: DXXXX EST FIN WT = 0.0000 lbs					lbs	('CC TAPER" × 110 IPS)			H15009N		

DWG NUMBER H15009N