




FIRE HYDRANTS WITH RESILIENT WEDGE GATE VALVES

With HYMAX Grip® Restraint

SUPER CENTURION 250
FIRE HYDRANT



CANADA VALVE™ CENTURY
FIRE HYDRANTS:
CENTURY | B-50-B

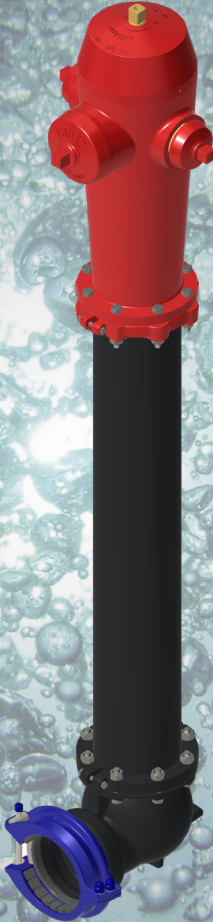


A-2361 RESILIENT WEDGE
GATE VALVE



INTRODUCING MUELLER RESILIENT WEDGE GATE VALVE AND SUPER CENTURION[®] FIRE HYDRANT WITH HYMAX GRIP[®] RESTRAINT. ALSO AVAILABLE WITH CANADA VALVE[™] CENTURY AND B-50-B FIRE HYDRANTS.

The HYMAX Grip[®] restraint is offered on 4"-12" A-2361 Mueller Resilient Wedge Gate Valves and Super Centurion[®] 250, Canada Valve Century and B-50-B Fire Hydrants. The HYMAX Grip restraint is a versatile single-bolt restraint capable of joining a wide selection of pipe types and diameters, resulting in easier, more flexible installations.

- 1 **Nuts, Bolts, & Washers** - 304 Stainless Steel Rolled Thread & Anti-Galling coating
- 2 **Spherical Spacers** - 304 Stainless Steel
- 3 **Gasket Bridge** - 304 Stainless Steel
- 4 **End Ring** - Ductile Iron Casting ASTM A536
- 5 **Grippers** - Metal Injection Molding, hardened and coated
- 6 **Gasket** - EPDM compounded for water applications
- 7 **Coating** - 100% Fusion Bonded Epoxy

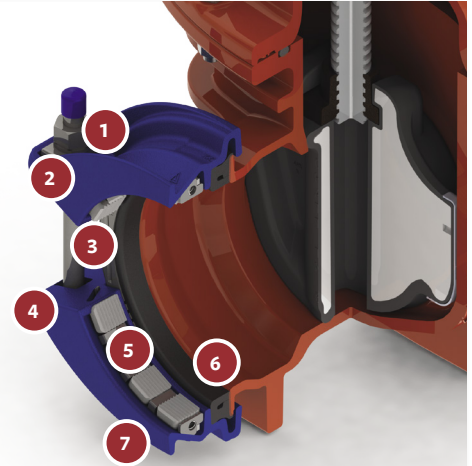

EASY INSTALLATION

- No assembly required
- Stab-fit design
- Easy-to-access top-facing bolt
- Pressure-assist gasket and restraint technology

FLEXIBILITY

- Joins and restrains pipes of different types and diameters
- Works with Ductile Iron, Cast Iron, PVC, and HDPE
- Dynamic deflection up to 4 degrees per grip joint end

CONFIGURATIONS

A-2361 RESILIENT WEDGE GATE VALVE

- Sizes 4" - 12" HYMAX Grip x HYMAX Grip and HYMAX Grip x Flange
- 1.5"/2" HYMAX Grip x HYMAX Grip
- 6" HYMAX Grip x MJ
- AWWA C515 Rated to 250 PSIG
- Certified to ANSI/NSF 61 and/or 372

SUPER CENTURION 250 FIRE HYDRANT


- Size 5-1/4" - Elbow shoe
- Size 4-1/2" - Elbow shoe
- ANSI/AWWA C502 Rated to 250 PSIG
- Certified to ANSI/NSF 61 and 372

CANADA VALVE[™] CENTURY FIRE HYDRANT

- Size 5" - Elbow shoe
- Size 4-1/2" - Elbow shoe
- ANSI/AWWA C502 Rated to 175 PSIG
- Certified to ANSI/NSF 61 and 372

B-50-B FIRE HYDRANT

- Size 4-1/2" - Elbow shoe
- ANSI/AWWA C502 Rated to 175 PSIG
- Certified to ANSI/NSF 61 and 372



For more information about Mueller or to view our full line of water products, please visit www.muellerwp.com or call Mueller customer service at 1.800.423.1323.

Mueller refers to one or more of Mueller Water Products, Inc. a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of its subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller[®], Echologics[®], Hydro Gate[®], Hydro-Guard[®], HYMAX[®], iZO[®], Jones[®], Krausz[®], Mi.Net[®], Milliken[®], Pratt[®], Pratt Industrial[®], Singer[®], and U.S. Pipe Valve & Hydrant. Please see muellerwp.com/brands and krauszusa.com to learn more.

© 2024 Mueller Co., LLC. All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller Co., LLC., its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com. These products are intended for use in potable water applications. Please contact your Mueller Sales or Customer Service Representative concerning any other application(s).

