


ITEM NO	PART NUMBER	QTY	DESCRIPTION	MATERIAL
1	547743	1	36" INSULATION PAD (SOLD SEPERATELY)	ETHAFOAM 220 WHITE OR POLYLAM 1.7 DENSITY WHITE
2	548554	2	STAINLESS STEEL SUPPORT BRACKET	12 GAUGE STAINLESS STEEL
3	780113	1	18" DIA CAST IRON LID W/ RECESSED TR (SOLD SEPERATELY)	CAST IRON ASTM A125 CLASS B AND CAST BRONZE ASTM B584/B62 ALLOY C84400/C83600
4	790038	4	1-1/2" HEX NUT	ASTM B16 ALLOY C36000
5	790242	1	36" X 48" SHELL SUB ASSEMBLY	SDR-32.5 POLYETHENE PIPE ASTM F714 DIPS
6	790438	1	36" EXTENSION RING W/ 18" OPENING (SOLD SEPERATELY)	CAST IRON ASTM A48 CLASS 25A AND 0.375" A36 CARBON STEEL
7	094988E	2	1-1/2" 90 DEG ELBOW	CAST BRONZE ASTM B584 ALLOY C89833
8	500B2428601N	2	1-1/2" FULL PORT BALL VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
9	500BN1000V01	2	1-1/2" BULKHEAD NIPPLE	ASTM B43 SEAMLESS RED BRASS C23000 O61 TEMPER
10	500PP2750	2	1-1/2" PIPE PART	ASTM B43 SEAMLESS RED BRASS C23000 O61 TEMPER

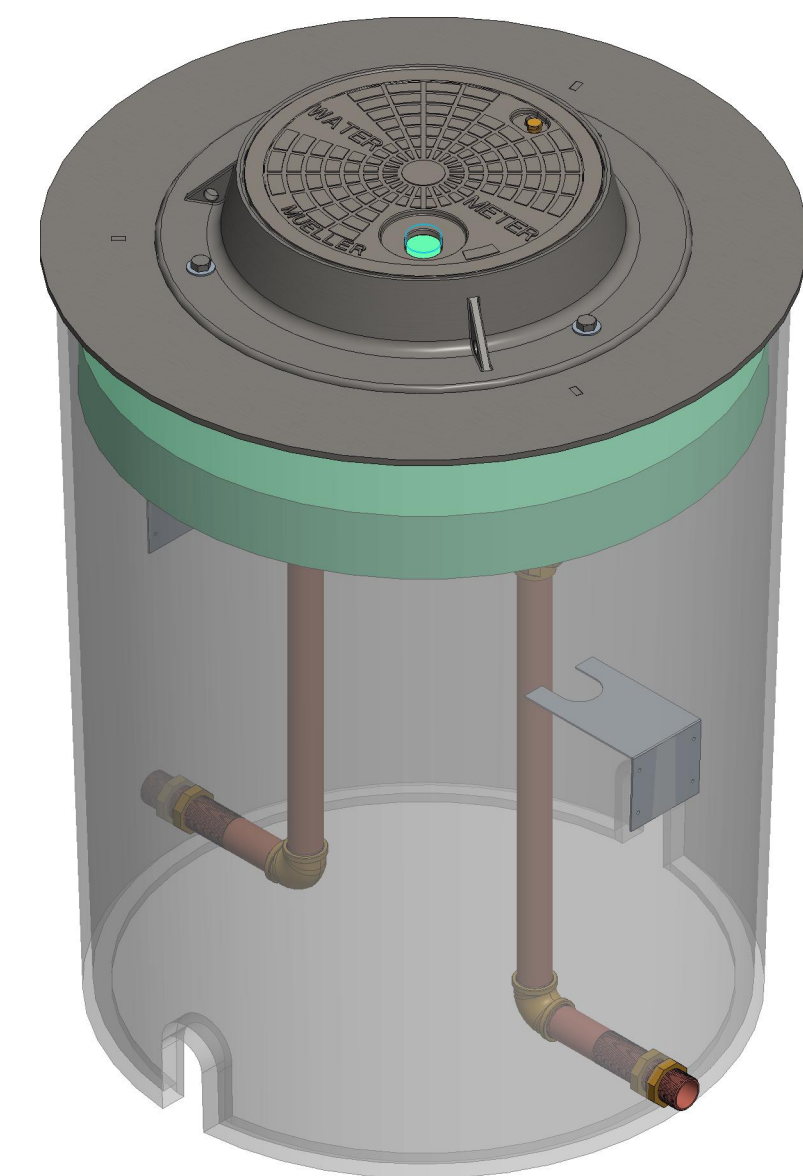

REVISIONS					
REV	ECR	DESCRIPTION	DRAWN BY	DATE	APPROVED
A		DRAWING CREATED	AOS	11/05/24	

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED.

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5 2018		NAME	DATE	THIRD ANGLE PROJECTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. MACHINING TOLERANCES:		DRAWN BY	AOS	Nov-05-24	
X ±1	±.015	D.E. APPR.			TITLE: 1-1/2" VAULT SINGLE METER PIT 36" DIA X 48" DEPTH LEAD FREE BRASS
.XX ±.005	±.005	M.E. APPR.			
XXX		Q.A. APPR.			
ANGULAR CORNER BREAK FINISH ±1° .015/.025 125 µin. RA		DO NOT SCALE DRAWING		SIZE	DWG. NUMBER
		= CRITICAL () = REFERENCE		C	500VS3648FFBNN
MATERIAL:		REF.NO.		SCALE: 0.059	WT:
STK NUMBER:					SHEET 1 OF 1