


No.	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	LEAD FREE BRASS ALLOY ASTM B584
2	O-RING	EPDM D2000
3	KEY	LEAD FREE BRASS ALLOY ASTM B584
4	SPRING WASHER	ASTM A103 ALLOY C51000 PHOS BRONZE
5	CAP	CAST BRASS ALLOY ASTM B584
6	GROOVE PIN	ASTM B124 ALLOY 655 SILICON BRONZE
7	PJ GASKET	EPDM D2000
8	PJ WASHER	POLYPROPYLENE
9	CLPG NUT SUB	CAST BRASS ASTM B62 ALLOY C83600

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED

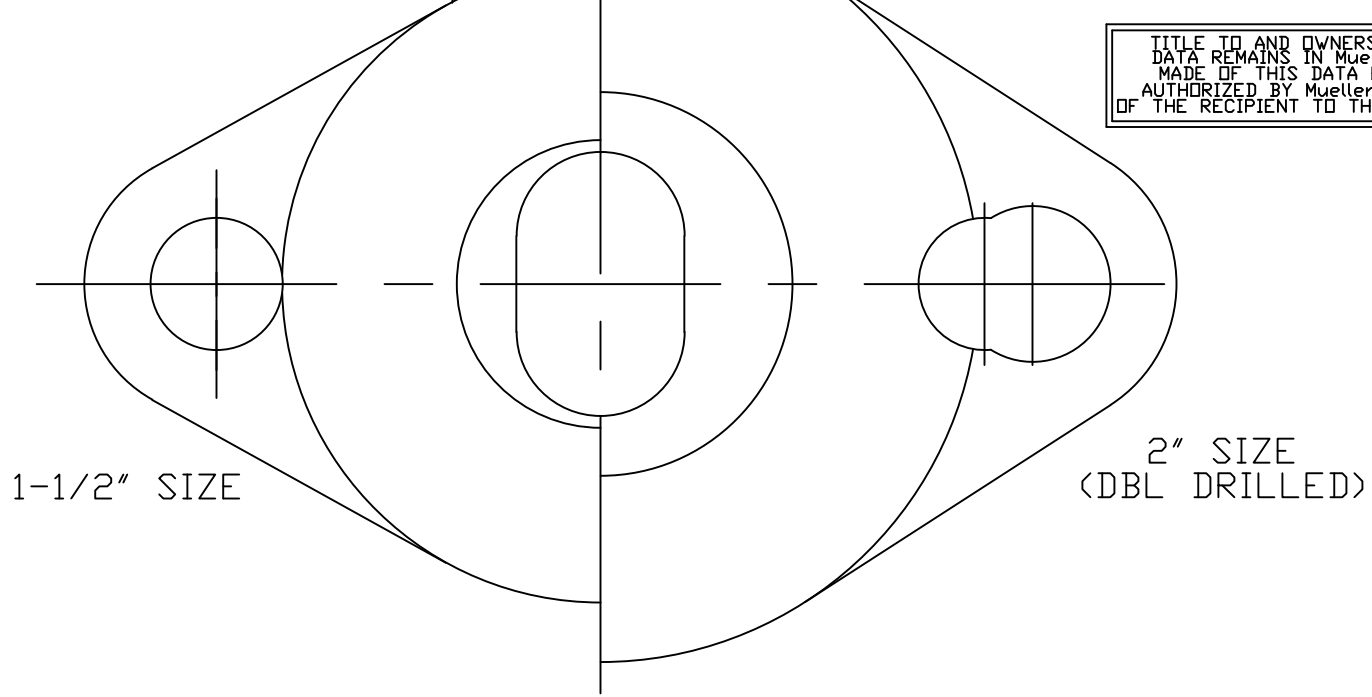

MEETS ALL REQUIREMENTS OF AWWA C800
 ALL WETTED PARTS ARE LEAD FREE BRASS ALLOY C89833/C87850
 ALL NON WETTED PARTS ARE BRASS ALLOY C83600/C87850

DWG NUMBER
P14277N

VALVE SIZE	A	B	C	D
1-1/2	1.812"	3.219"	2.786	6.005
2	2.188"	3.199"	3.071	6.270

DRFTR JGarvin 10/11/10	MUELLER	UNLESS OTHERWISE NOTED THIRD ANGLE PROJECTION	
CHKR			SURFACE PREPARATION: BREAK CORNER(S) ---- .000 SURFACE FINISH -- XX RMS
ENGR			
MGR			REF. No.
BY	DATE		
STK No:			
MAT'L:	ANGLE METER LLB STOP VALVE		
DESCR.	(PJ CTS x MTR FLANGE)		
		DWG NUMBER P14277N	