



203CT1874RBBL000709N

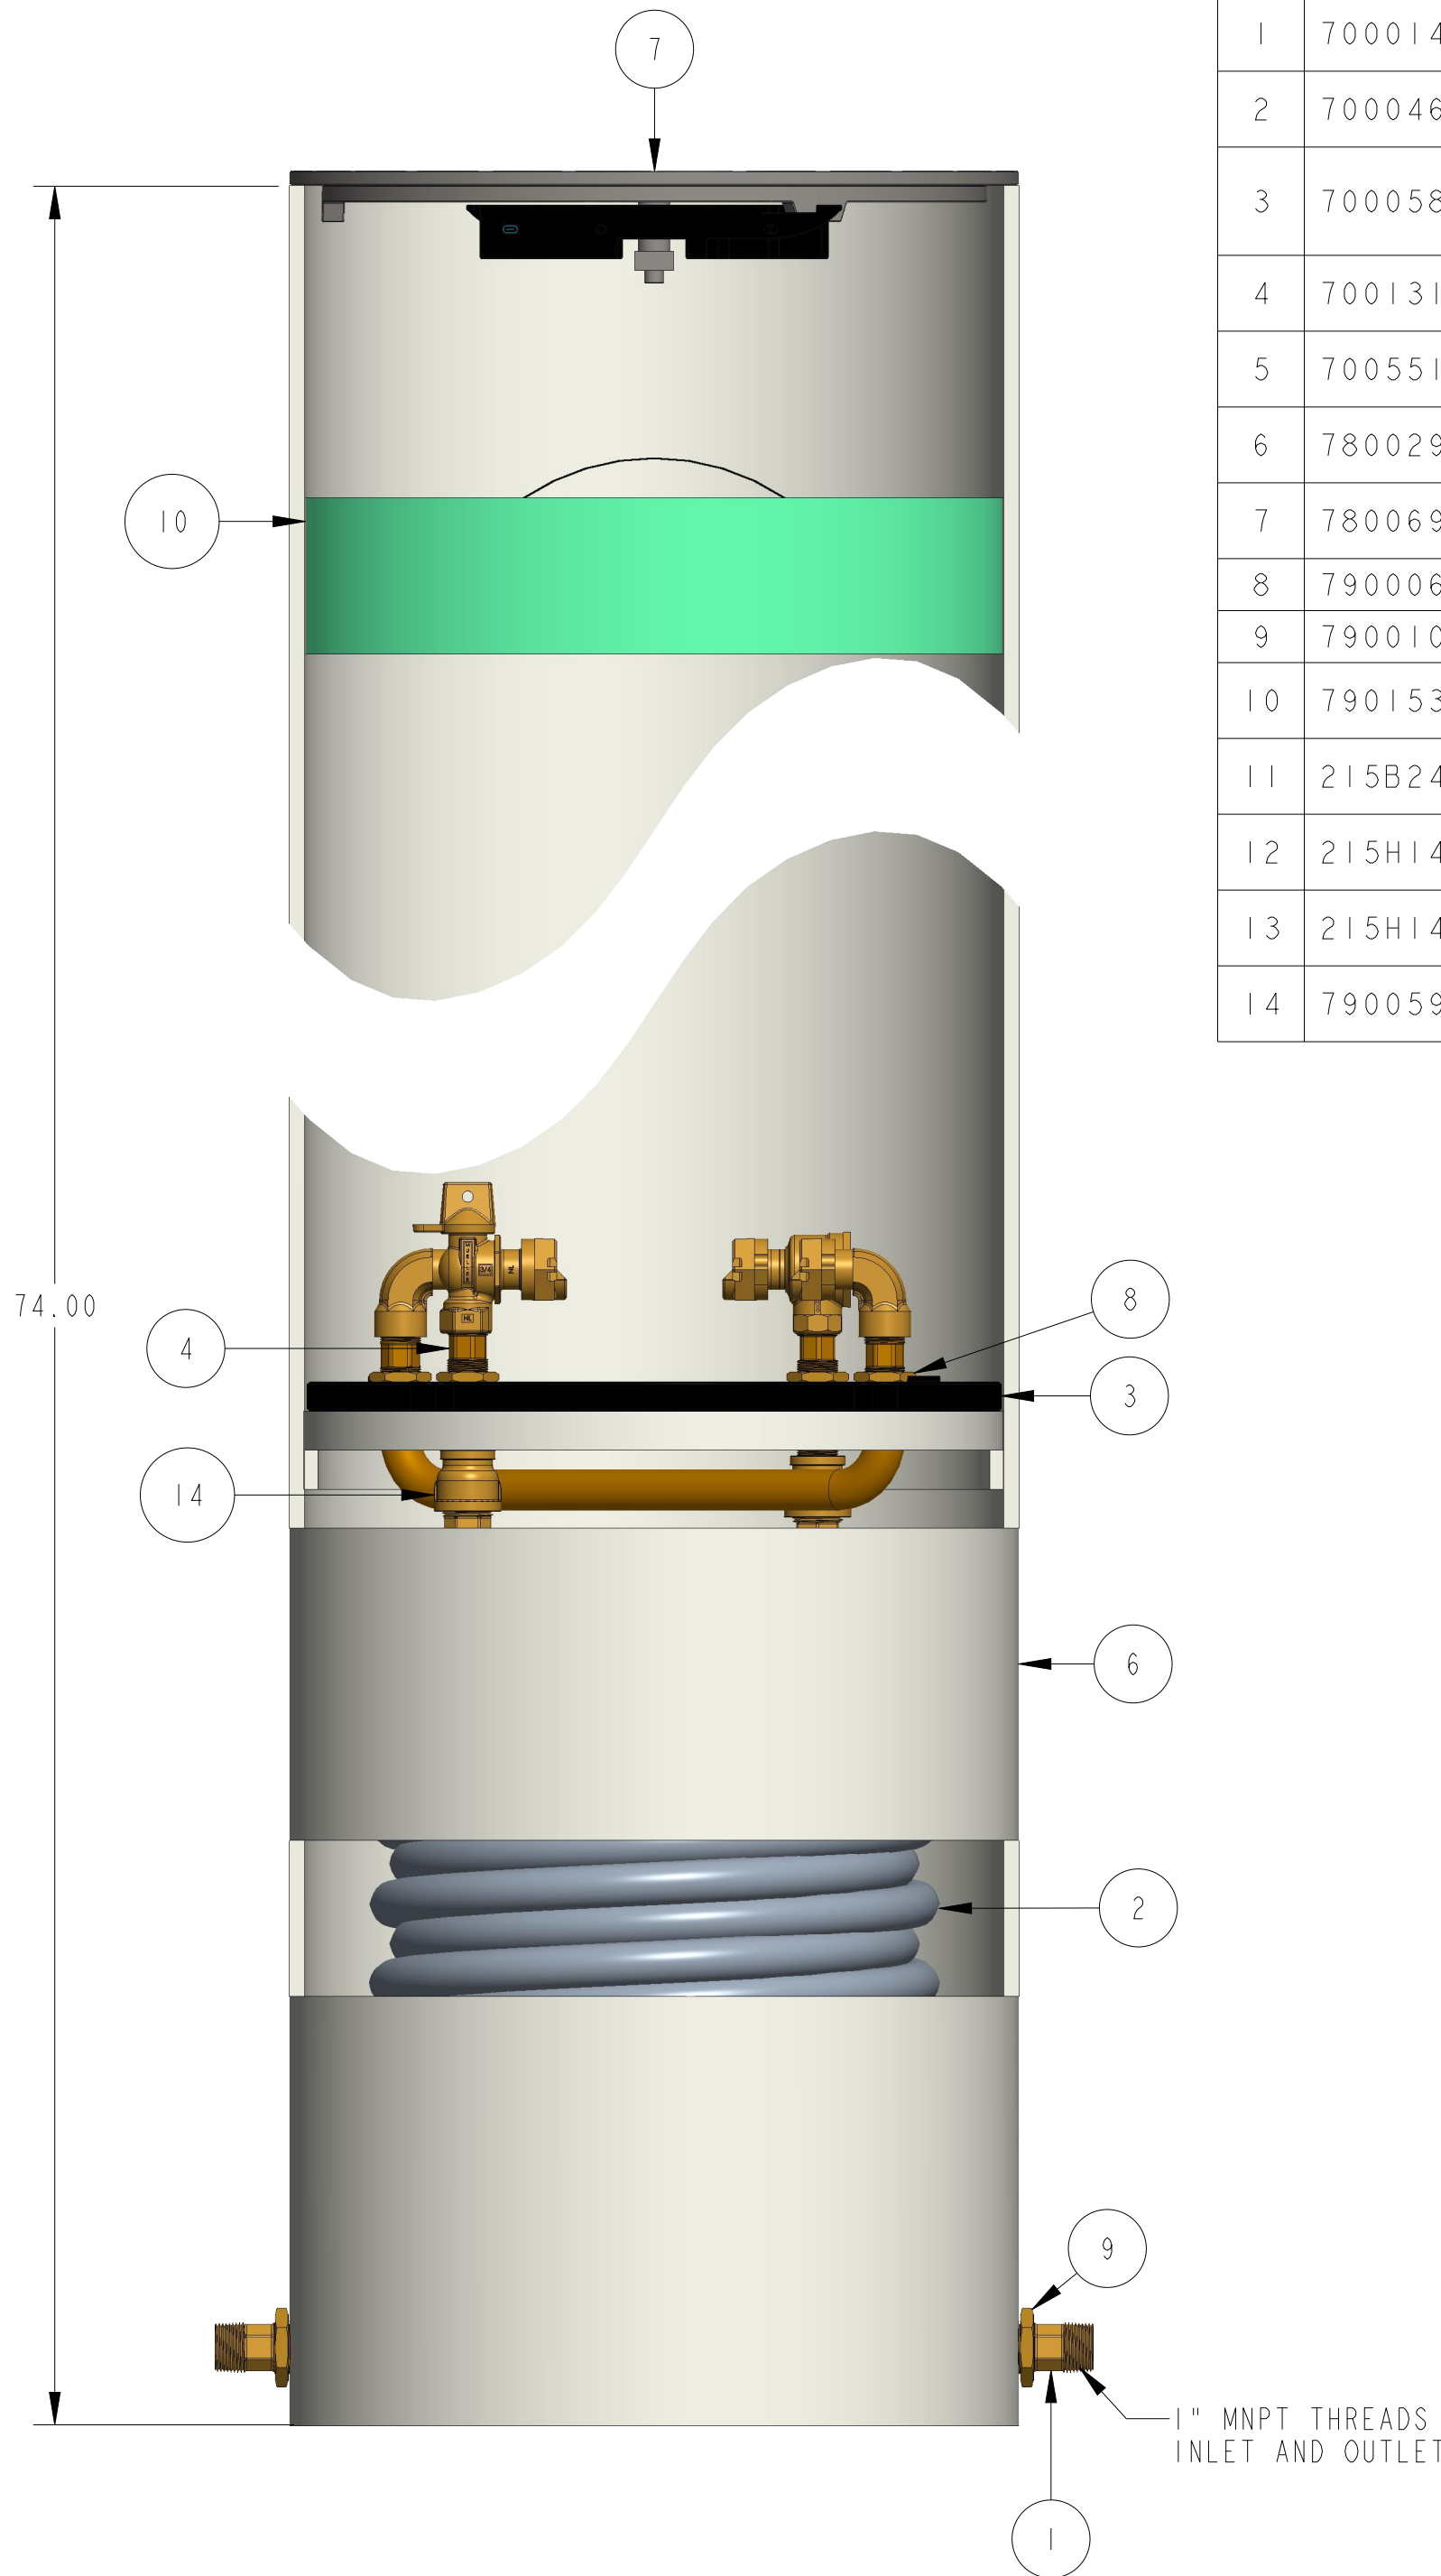

ITEM NO	PART NUMBER	QTY	DESCRIPTION	MATERIAL
1	700014	4	1" HOSE CONNECTOR	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
2	700046-1874	2	1" COIL PART	POLYBUTYLENE RESIN BASELL AKOALIT PB4267 OR 4237 GREY
3	700058	1	PLATFORM	PASTIC VIRGIN POLYLAC, PA747 ABS BLACK RESIN OR PROOFED EQUIVALENT RESIN
4	700131	2	3/4" NIPPLE WITH WRENCH FLATS	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
5	700551	1	3/4" U-BAR	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
6	780029-1874	1	18" SHELL SUB ASSEMBLY	SDR-51 PVC PIPE ASTM D2241 GRADE 1120
7	780069	1	18" DIA CENTER LOCKING LID (NOT INCLUDED)	CAST IRON ASTM A126 CLASS B
8	790006	8	3/4" HEX NUT	ASTM B16 ALLOY C36000
9	790010	4	1" HEX NUT	ASTM B16 ALLOY C36000
10	790153	1	18" INSULATION PAD (SOLD SEPARATELY)	ETHAFOAM 220 WHITE OR POLYLAM 1.7 DENSITY WHITE
11	215B2426551RN	1	5/8" X 3/4" REDUCED PORT BALL VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
12	215H14210	2	5/8" X 3/4" METER COUPLING (SWIVEL NUT)	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
13	215H14244	1	5/8" X3/4" DUAL CHECK VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
14	790059E	2	1" X 3/4" BELL REDUCER	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850

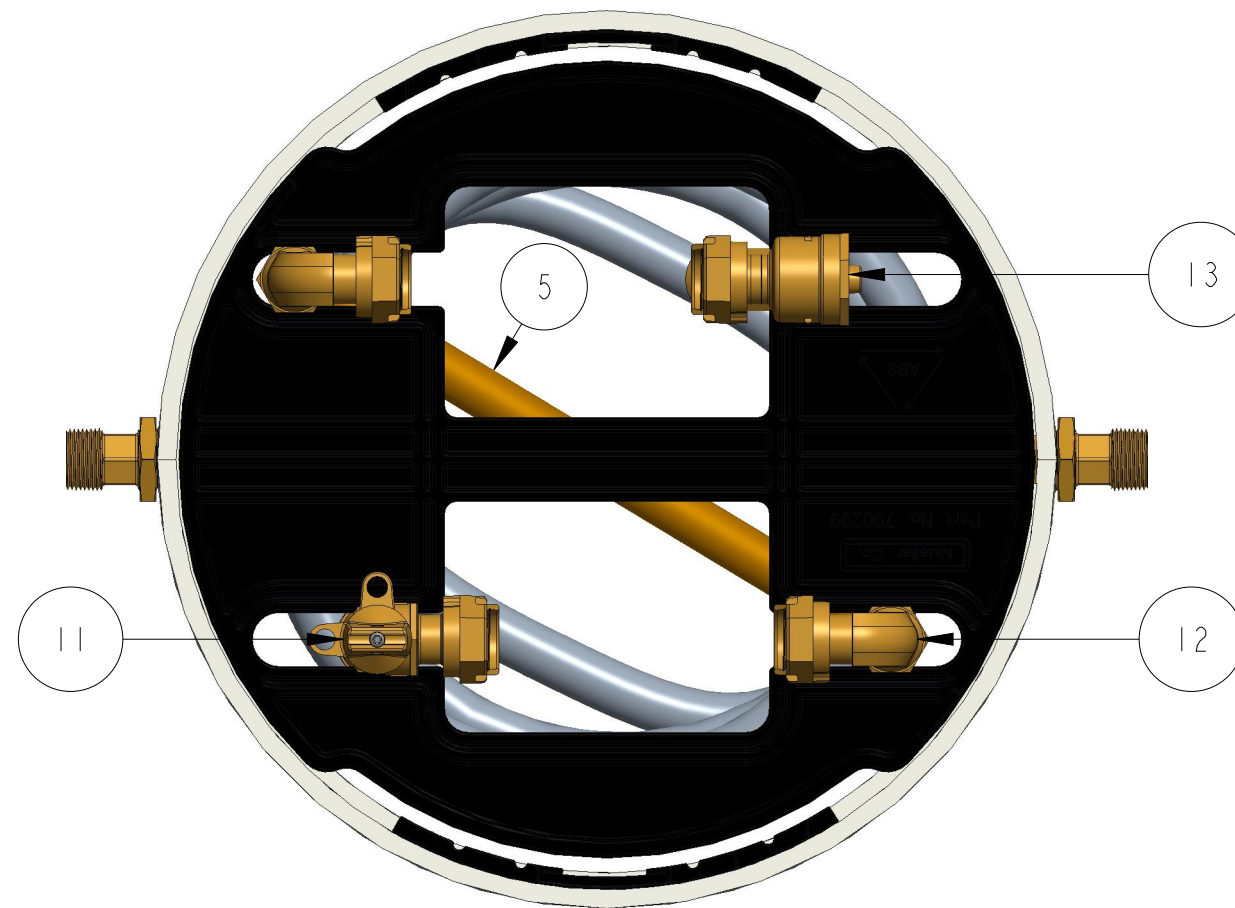

OPTION CODE 709:
 *1" COIL INSTEAD OF 3/4"
 *TANDEM FOR A WATTS 5M3-Z6 PRV
 *INSTALL LID 780069 PRIOR TO SHIPPING

DR. BY	AOD	12/30/21	UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	C.B. NO.
CHKR			BREAK CAST CORNER(S)---		
ENGR			BREAK MACH CORNER(S)---	PURCH.	FINISH
MGR			TOLERANCES	REF. NO.	SCALE
MFG			UNLESS OTHERWISE NOTED	STR. NO.	
TOOL			LINEAR	ANGULAR	
FDRY			±	±	
MAT'L:					
MUELLER			DESCR. 5/8"X3/4" COIL TANDEM METER PIT 18" DIA X 74" DEPTH LEAD FREE BRASS		NUMBER 203CT1874RBBL000709N