
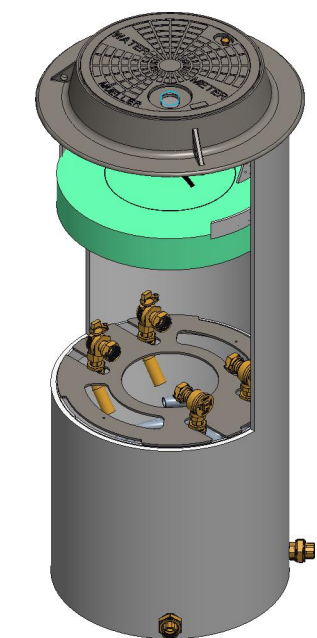


ITEM NO	PART NUMBER	QTY	DESCRIPTION	MATERIAL
1	546130	1	24" STEEL PLATFORM	HOT ROLLED STEEL
2	550119	2	REINFORCING RING	SDR 51 PVC PIPE ASTM F789 GRADE 1120
3	552079	1	1-1/2" X 4-1/4" NIPPLE	RED BRASS ASTM B43 ALLOY C23000 HARD TEMPER
4	700014	8	1" HOSE CONNECTOR	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
5	700028-2460	1	SHELL SUB ASSEMBLY	SDR-51 PVC PIPE ASTM D2241 GRADE 1120
6	700046-1860	4	COIL PART	POLYBUTYLENE RESIN BASELL AKOALIT PB4267 OR 4237 GREY
7	700098-1	1	CAST IRON FRAME (PURCHASED SEPARATELY)	CAST IRON ASTM A48 CLASS 25A
8	700442	2	REINFORCING RING	SDR 51 PVC PIPE ASTM F789 GRADE 1120
9	780113	1	18" DIA CAST IRON LID W/ RECESSED TR (SOLD SEPARATELY)	CAST IRON ASTM A125 CLASS B AND CAST BRONZE ASTM B584/B62 ALLOY C84400/C83600
10	790010	10	1" HEX NUT	ASTM B16 ALLOY C36000
11	790038	1	1-1/2" HEX NUT	ASTM B16 ALLOY C36000
12	790325	1	24" X 4" EZ INSULATING PAD (OPTIONAL)	ETHAFOAM 220 WHITE OR POLYLAM 1.7 DENSITY WHITE
13	047169E	1	1" X 1-1/2" HEX BUSHING	CAST BRONZE ASTM B584 ALLOY C89833
14	330B24265	2	1" FULL PORT BALL VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
15	330HI4211N	2	1" UNION	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
16	330HI4244-A	2	1" ANGLE DUAL CHECK ASSE APPROVED	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
17	547261E	1	1-1/2" UNION	LEAD FREE BRASS ASTM B-584-06A
18	790158E	2	1-1/2" STREET ELBOW	LEAD FREE BRASS ASTM B584 C89833
19	790187E	1	1-1/2" X 1-1/2" X 1" FIP THREADED TEE	CAST BRONZE ASTM B584 ALLOY C89833

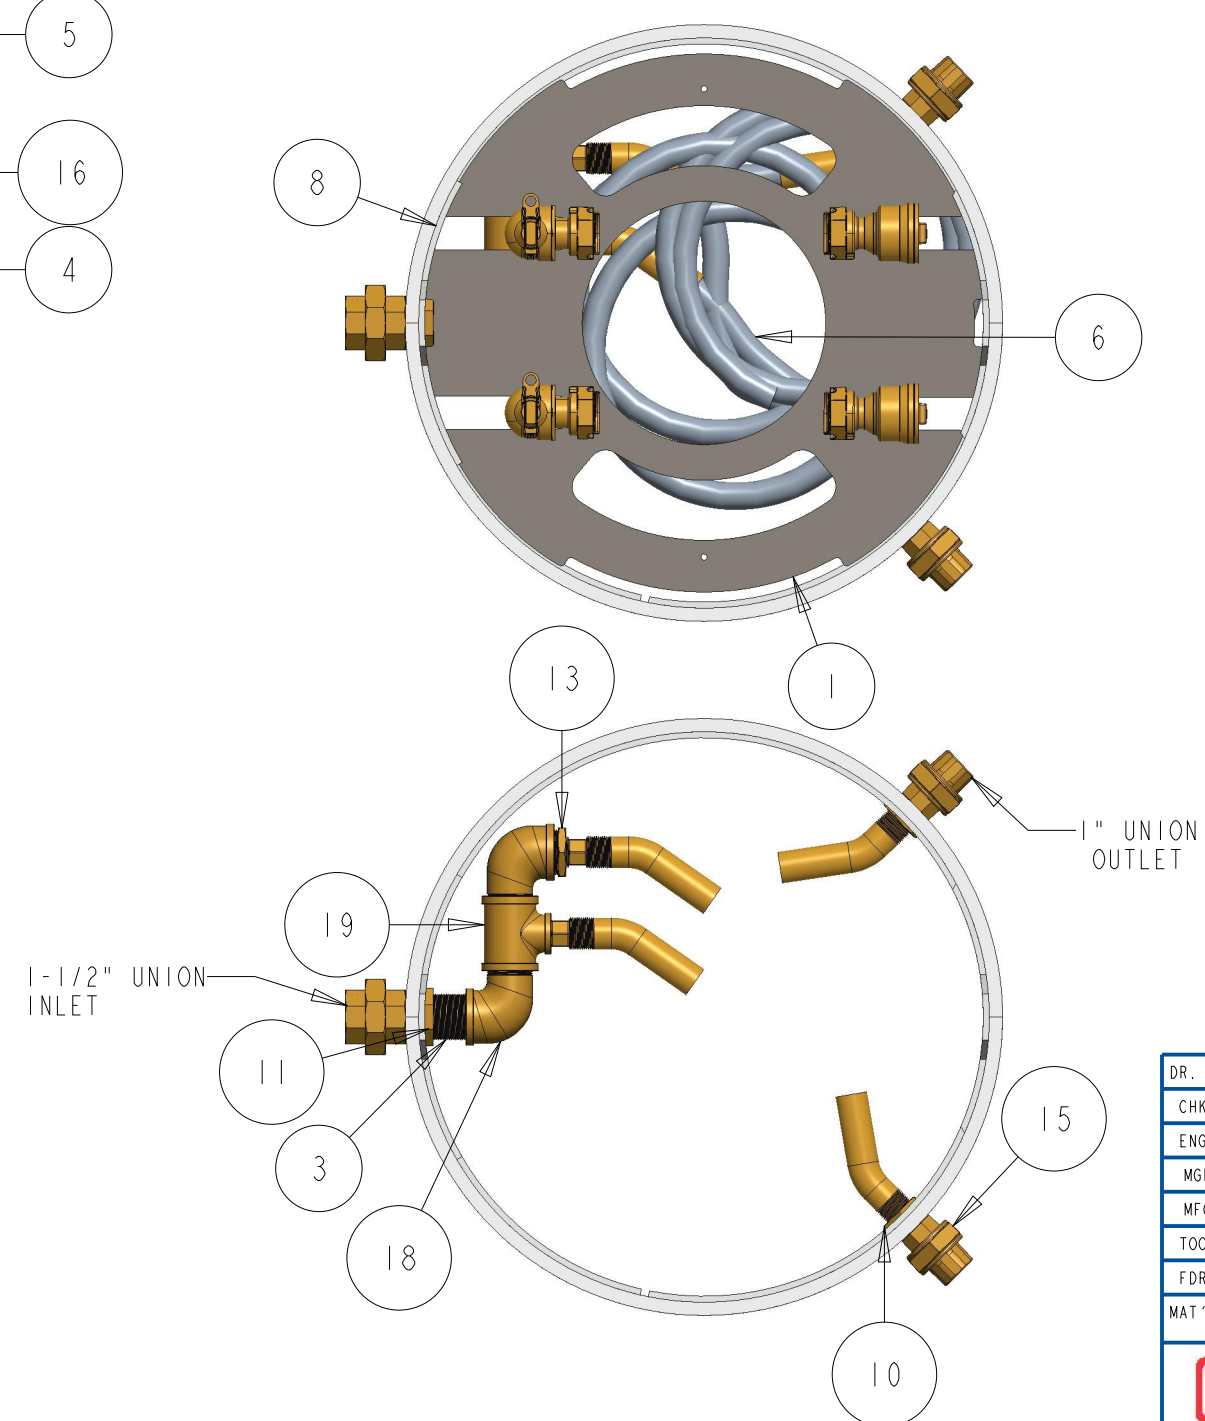

OPTION CODE 498:

- \*SINGLE INLET W/ 1-1/2" UNION
- \*TWO OUTLETS W/ 1" UNION
- \*ALL UNIONS TIGHTENED AGAINST SHELL

DR. BY	AOD	11/6/19	UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	C.B. NO.
CHKR			BREAK CAST CORNER(S)---		
ENGR			BREAK MACH CORNER(S)---	PURCH.	FINISH
MGR			TOLERANCES	REF. NO.	PATT. NO.
MFG			UNLESS OTHERWISE NOTED	SCALE	
TOOL			LINEAR	ANGULAR	
FDRY			±	±	STR. NO.
MAT'L:					
<b>MUELLER</b>			DESCR. 1" COIL DOUBLE METER PIT 24" DIA X 60" DEPTH LOW LEAD BRASS		NUMBER 330CD2460FSBSN000498N